

## Cascade Cylinder Fill Assemblies & Connecting Whips

Cascade fill assemblies are used for refilling 2216 or 4500 psi SCBA cylinders. Fill assemblies include a 5 foot high pressure fill whip, gauge, universal hand-tight nut CGA 346/347, on/off valve, and bleed valve. Cylinder connecting whips are supplied with a CGA stem, nut, and tee assembly. Additional cylinder connecting whips can be added to any of the below assemblies for additional storage cylinders. **Cylinders sold separately - see page 38.**



CBF3-346NB




CW-30



HP-FW5-346



RG-6000FIL

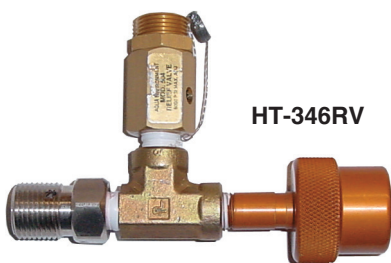

HT-346RV

### Cascade Cylinder Fill Assemblies

Item No.	Description
CBF3-346NB	3 cylinder fill assembly, CGA-346, 3000 psi
CBF3-347NB	3 cylinder fill assembly, CGA-347, 5000 psi
CBF3-702NB	3 cylinder fill assembly, CGA-702, 6000 psi

Cylinders sold separately - see page 38

Additional breathing air assemblies and low pressure bell alarm options available. Contact Customer Service.

### Air Cylinder Connecting Whips 30" Whip with Tee - No Check Valve

Item No.	Description
CW-30	CGA-346 stem and nut - 3000 psi
CW-30HP	CGA-347 stem and nut - 5000 psi
CW-30-702	CGA-702 stem and nut - 6000 psi

Cylinders sold separately - see page 38

### 30" Connecting Whip with Check Valve & Tee

Item No.	Description
CWCV-30	CGA-346 stem and nut - 3000 psi
CWCV-30HP	CGA-347 stem and nut - 5000 psi
CWCV-702	CGA-702 stem and nut - 6000 psi

Cylinders sold separately - see page 38

### Cylinder Fill Whips

Item No.	Description
HP-FW5-346	<b>Low Pressure Fill Whip</b> CGA-346, 3000 psi max, universal hand-tight nut
HP-FW5-347	<b>High Pressure Fill Whip</b> CGA-347 only, 5000 psi max, hand-tight nut
HP-FW5-702	<b>Ultra High Pressure Fill Whip</b> CGA-702, 6000 psi max, wrench tight

All Cylinder Fill Whips come with 5 foot high pressure hose, on/off valve, pressure gauge, bleed valve, and connecting nut. Cylinders not included. Special lengths available.

### Fill Regulator

Item No.	Description
RG-6000FIL	Fill regulator, 6000 psi inlet, 0-5000 psi outlet with gauges, hand tight CGA-347 inlet and 1/4" NPT outlet
RG6KFIL702	Fill regulator, 6000 psi inlet, 0-5000 psi outlet with gauges, wrench tight CGA-702 inlet and CGA-347 outlet

### High Pressure to Low Pressure Adapter

Item No.	Description
HT-346RV	Safety fill adaptor CGA-347 to CGA-346, 2400 psi relief pressure