



**8" Intrinsically Safe  
Pneumatic Blower  
SVB-A8**



**8" Conductive Ventilation Kit  
SV-CUPCND**

## Approved for Hazardous Location Usage:

**SVB-E8EXP** - CSA C/US certified for Classes I and II, Groups C, D, E, F, and G.

**SVB-A8** - CE Registered

## 8" Centrifugal Blowers for Hazardous Locations

Item No.	Description
<b>SVB-E8EXP</b>	Explosion-proof electric blower - 3/4 HP, 115 VAC, 60 Hz, 12.6 amp. CSA C/US Certified. CE Registered. 72 lbs, <b>no plug.</b>
<b>SVB-E8X250</b>	Explosion-proof electric blower - 3/4 HP, 230 VAC, 50 Hz, 78 lbs CE Registered. <b>No plug.</b>
<b>SVB-A8</b>	Pneumatic motor - 4 HP, operates from 10-100 psi. Includes moisture/oil separator and filter. CE Registered. 61 lbs

Explosion-Proof Plug sold separately. See below.

## 8" Saddle Vent® Kits for Hazardous Locations


Item No.	Description
<b>SVB-E8XCUP</b>	SVB-E8EXP explosion-proof electric blower and SV-CUPCND Conductive Kit, <b>no plug.</b>
<b>SVB-A8CUP</b> <b>SV-CUPCND</b>	SVB-A8 Intrinsically Safe pneumatic blower and SV-CUPCND Kit <b>Conductive Ventilation Kit:</b> Conductive Saddle Vent®, 90° conductive elbow, 6 and 15 foot conductive duct, duct canister, and universal mount

Explosion-Proof Plug sold separately. See below.

## Explosion-Proof Plugs - Certified

Item No.	Description
<b>ELAP15231</b>	15 AMP, 125 VAC, EXP plug w/quick wiring (5-15P) USA / Canada
<b>ELAP20231</b>	20 AMP, 125 VAC, EXP plug w/quick wiring (5-20P) USA / Canada
<b>ELAP15232</b>	15 AMP, 250 VAC, EXP plug w/quick wiring (6-15P) International
<b>ELAP20232</b>	20 AMP, 250 VAC, EXP plug w/quick wiring (6-20P) International

No additional charge for installation prior to shipment.

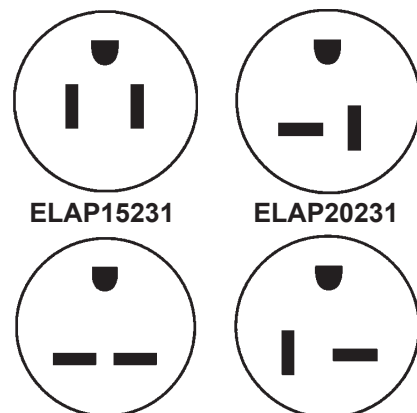

**ELAP15231**      **ELAP20231**  
**ELAP15232**      **ELAP20232**  
**Explosion-Proof Plugs**

