


Petro-Vent™ Tank Ventilator

The Petro-Vent™ blower was designed to meet hazardous location ventilation requirements for underground storage tanks. A special flange adapter threads directly on the 4-inch vent pipe found on most storage tanks. The ASI-1000, ASI-1200 and ASI-2900 bolt directly on a compatible flange adapter.



Petro-Vent™ Adapter
ASI-12ADPT

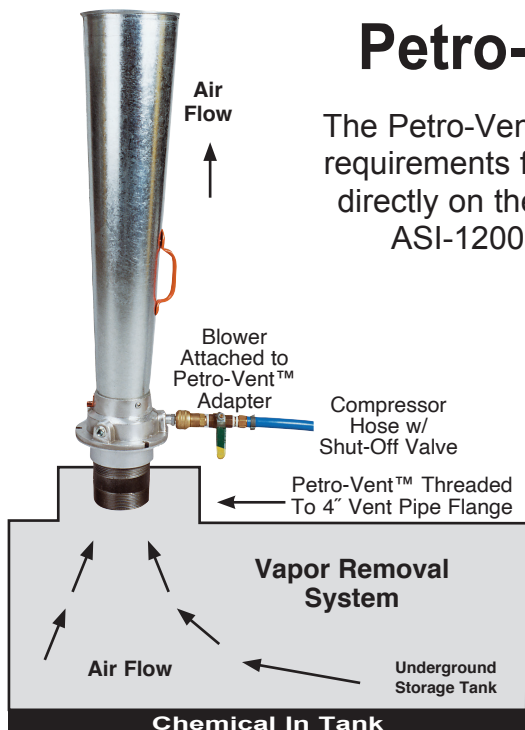

Petro-Vent™ Adapters

Item No.	Description
ASI-12ADPT	Petro-Vent™ Adapter, includes flange adapter and 4" threaded nipple; fits ASI-1000 and ASI-1200 style blowers
ASI-29ADPT	Petro-Vent™ Adapter for ASI-2900 blower

Pneumatic Jet Fans Designed for Hazardous Location Tank Ventilation

Circular Pneumatic Jet Fans


Item No.	Description
ASI-JF20	Cast Aluminum Pneumatic Jet Fan - 20" diameter
ASI-JF24	Cast Aluminum Pneumatic Jet Fan - 24" diameter

Grounding wire and Chicago fitting included

Model No.	Fits API Diameter Inch	Max Free Air CFM	Inlet Pressure PSI	Inlet Flow Required CFM	Weight Lbs.
ASI-JF20	20	10,400	40-110	60-290	95
ASI-JF24	24	16,130	40-110	76-338	132



Pneumatic Jet Fan
ASI-JF24

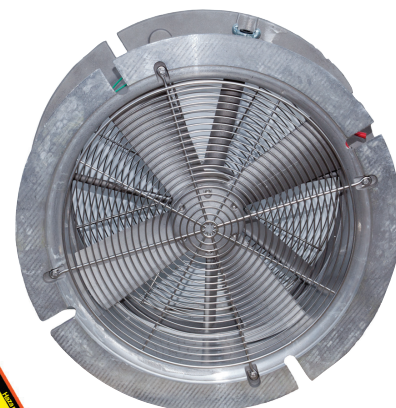

Pneumatic Jet Fan
ASI-JF20



Portable Pneumatic Jet Fans

Item No.	Description
ASI-JF12	Cast Aluminum Pneumatic Jet Fan - 12" diameter
ASI-JF16	Cast Aluminum Pneumatic Jet Fan - 16" diameter

Grounding wire and Chicago fitting included

Model No.	Size Outlet	Max Free Air CFM	Inlet Pressure PSI	Inlet Flow Required CFM	Weight Lbs.
ASI-JF12	12	1680-2860	40-100	55-130	41
ASI-JF16	16	2540-4200	40-110	54-128	63



Pneumatic Jet Fan
ASI-JF16



Pneumatic Jet Fan
ASI-JF12