

# Air-Light® & Air-Light® II

## DC Powered Area Light Series



*Portable Area Lighting for  
Industrial, Emergency, and  
Highway Applications*



*Leading The Safety Industry Since 1984*  
[www.airsystems.com](http://www.airsystems.com)

# Air-Light®

- For use in ALL WEATHER CONDITIONS AND TERRAIN!
- IP54 rated for dust protected and water splashing
- Internal battery can be charged from external 12 VDC or 110-240 VAC power sources and the Air-Light® can operate while charging
- Power port socket for charging the internal battery or powering cell phones, laptops, or other device utilizing 12 VDC power
- Operate/charge with clamp style jumper cables
- Air-Light® delivered fully assembled in a roller case with handle
- Air-Light® deploys/stows rapidly without the use of tools and folds to fit within the integral case
- Stainless steel legs extend up to 33"
- Operational in sustained 35 mph full frontal winds, 65+ mph rear winds
- Aluminum mast extends from a range of 30" - 87" above ground
- Dimensions closed: 14" W X 10" D X 21.5" H
- Weight: 44 lbs.



LIFETIME WARRANTY ON LIGHT HEADS

Air-Light® patent information:  
[www.airsystems.com](http://www.airsystems.com)

## Air-Light® Applications

- Area Lighting
- Construction & Maintenance
- Utility Work
- Emergency Response Lighting
- Crime Scene Investigation
- Power Outages
- Hospital Triage

Fully Extends to 87" Height



Folds Into Rolling Case

Light Head Run Times On Back Page



**AL4KBP**  
4000 Lumen



**AL9800BP**  
9800 Lumen

# Air-Light® II

Fully Extends  
to 8' Height



Light Head  
Run Times  
On Back Page



AL2-4K-35  
4000 Lumen



- For use in ***ALL WEATHER CONDITIONS & TERRAIN!***
- IP54 rated for dust protected and water splashing
- Sets up in seconds - no tools required
- Up to an 8 foot light extension
- 12 VDC sealed 35 amp hour AGM lead acid battery
- 12 VDC power port for charging
- Vehicle Jumper Connection Posts
- Adjustable directional lampheads
- Digital push-to-test voltage meter
- 18" Stainless steel collapsible legs retract for storage
- Legs extend to provide stable tripod base
- Independent light on/off switches
- Amber LED flasher light on/off switch
- Cord storage in front & rear pockets
- Dimensions: 17" W X 8" D X 26" H
- Weight: 44 lbs.

Air-Light® II  
patent information:  
[www.airsystems.com](http://www.airsystems.com)

## Air-Light® II Applications

- Area Lighting
- Flagger Lighting
- Construction & Maintenance
- Utility Work
- Emergency Response Lighting
- Power Outages
- Hospital Triage



AL2-95-35  
4000 Lumen

Light Heads Rise to 8 foot Height  
to Illuminate Highway Flaggers



25 Feet / 7 Meters



## Light Run Time (in Hours)



4000 Lumen  
2 Light Heads



9500 Lumen  
2 Light Heads



9800 Lumen  
2 Light Heads

Air-Light®



22 Amp Battery


Run Hours		
1 Head Operating	Configuration not offered	1 Head Operating
<b>14+</b>		<b>7+</b>
2 Heads Operating		2 Heads Operating
<b>7+</b>		<b>4+</b>

Air-Light® II



35 Amp Battery

Run Hours		
1 Head Operating	1 Head Operating	1 Head Operating
<b>25+</b>	<b>9+</b>	<b>9+</b>
2 Heads Operating	2 Heads Operating	2 Heads Operating
<b>14+</b>	<b>5+</b>	<b>5+</b>

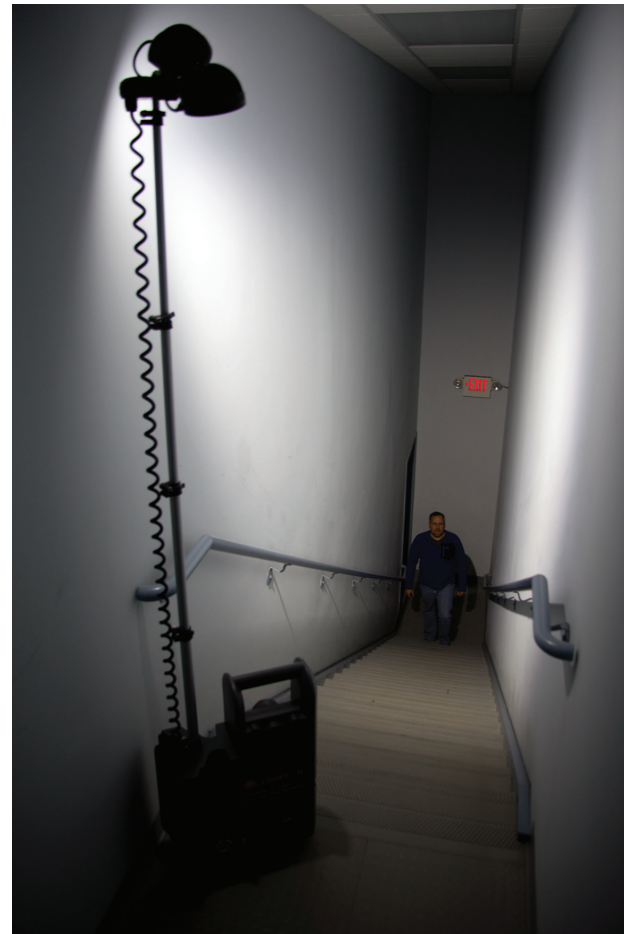

### Light Head Specifications:

- IP-68 rated dustproof and waterproof
- Anodized aluminum frame with a polycarbonate lens
- Operating temperature: -40°F to 176°F (-40°C to 80°C)



4000 total lumens  
2 Lights per Unit  
2 amps, 24 watts



9500 total lumens  
2 Lights per Unit  
7.5 amps, 90 watts



**MORE LUMENS!**  
9800 total lumens  
2 Lights per Unit  
6.65 amps, 80 watts



All LED Lights Have a 60° Flood Beam Pattern

### The Air-Light®

Model No.	Description
AL4KBP	Air-Light®, LED lights, 4000 total lumens
AL9800BP	Air-Light®, LED lights, 9800 total lumens

All Air-Light® models include 22 amp battery, internal 3 amp battery charger, and charging cables



**WARNING:** This product contains a sealed lead acid battery which can expose you to chemicals including **Lead** and **Sulfuric Acid**, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### The Air-Light® II

Model No.	Description
AL2-4K-35	Air-Light® II, LED lights, 4000 total lumens
AL2-95-35	Air-Light® II, LED lights, 9500 total lumens
AL2-98-35	Air-Light® II, LED lights, 9800 total lumens

All Air-Light® II models include 35 amp battery, internal 3 amp battery charger, and charging cables

**Air Systems International, Inc.**

Email: [sales@airsystems.com](mailto:sales@airsystems.com)

Catalog Request: [catalog@airsystems.com](mailto:catalog@airsystems.com)

[www.airsystems.com](http://www.airsystems.com)