

Panel Mounted Grade-D Breathing Air Filtration for Permanent Mounting Applications



Panel Mounted Grade-D Air Filtration with CO Monitor

Model No.	Description
BB15-COPM	15 cfm Grade-D breathing air panel, 48 cfm flow capacity, 1 coupling
BB30-COPM	30 cfm Grade-D breathing air panel, 48 cfm flow capacity, 2 couplings
BB50-COPM	50 cfm Grade-D breathing air panel, 79 cfm flow capacity, 4 couplings
BB75-COPM	75 cfm Grade-D breathing air panel, 97 cfm flow capacity, NPT outlet *
BB100-COPM	100 cfm Grade-D breathing air panel, 123 cfm flow capacity, 4 couplings. 6 or 8 couplings available for additional charge.
BB150-COPM	150 cfm Grade-D breathing air panel, 203 cfm flow capacity, NPT outlet - Custom *
BB250-COPM	250 cfm Grade-D breathing air panel, 419 cfm flow capacity, NPT outlet - Custom *
BB650-COPM	650 cfm Grade-D breathing air panel, 710 cfm flow capacity, NPT outlet - Custom *



* NPT Outlet available on all panel mounted filtration systems. To comply with NIOSH when using an NPT outlet, a Point of Attachment (POA) should be used. See Pages 21-22 for available POA's.

Panel Mounted Grade-D Air Filtration with CO/O₂ Monitor

Model No.	Description
BB30-CO2PM	30 cfm Grade-D breathing air panel, 48 cfm flow capacity, 2 couplings
BB50-CO2PM	50 cfm Grade-D breathing air panel, 79 cfm flow capacity, 4 couplings
BB100CO2PM	100 cfm Grade-D breathing air panel, 123 cfm flow capacity, 4 couplings. 6 or 8 couplings available for additional charge.


Panel Mounted Grade-D Air Filtration with CO Monitor and Auto-Air™

Model No.	Description
BB30COAAPM	30 cfm Grade-D breathing air panel, 48 cfm flow capacity, 2 couplings
BB50COAAPM	50 cfm Grade-D breathing air panel, 79 cfm flow capacity, 4 couplings
B100COAAPM	100 cfm Grade-D breathing air panel, 123 cfm flow capacity, 4 couplings. 6 or 8 couplings available for additional charge.

Panel Mounted Grade-D Air Filtration with Intrinsically Safe CO Monitor

Model No.	Description
BB15COPMIS	15 cfm Grade-D breathing air panel, 24 cfm flow capacity, 1 coupling
BB30COPMIS	30 cfm Grade-D breathing air panel, 48 cfm flow capacity, 2 couplings
BB50COPMIS	50 cfm Grade-D breathing air panel, 79 cfm flow capacity, 4 couplings
B100COPMIS	100 cfm Grade-D breathing air panel, 123 cfm flow capacity, 4 couplings. 6 or 8 couplings available for additional charge.



 CSA Approved for Class I, Division 1, Groups C and D environments, 9 VDC operation only, providing 40 hours usage.

Please specify 1/4" Hansen style or Schrader style fittings when ordering. Other fittings available for an additional charge - see page 92 for information.


Custom Designed Panel Filtration Options

- Independent Regulators
- Fully Automated Reserve Air System
- Low Pressure Alarms
- Explosion-Proof Enclosures
- Large Fixed Systems up to 3000 cfm

Custom modifications available to meet the most demanding customer requirements. Contact our technical sales department for additional details. Engineering drawings and specifications will be provided for your application.



Explosion-Proof Remote Alarm
50-EXALPST

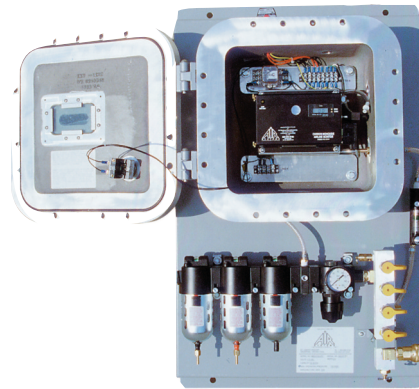

Explosion-Proof Grade-D Custom Filtration Panel
B50-COPMEX