


# The Auto-Air™ Breather Box®

## Fully Automatic Reserve Air System for Work Requiring Backup Air

The Auto-Air™ filtration system was developed to provide Grade-D breathing air with full automatic reserve air for use in IDHL work locations. In the event of electrical failure or reduced pressure from the primary air source, reserve air activation automatically switches to the reserve air cylinder(s). Local and optional remote alarms signal to the workers the primary air system has failed and has switched to the back-up air system.

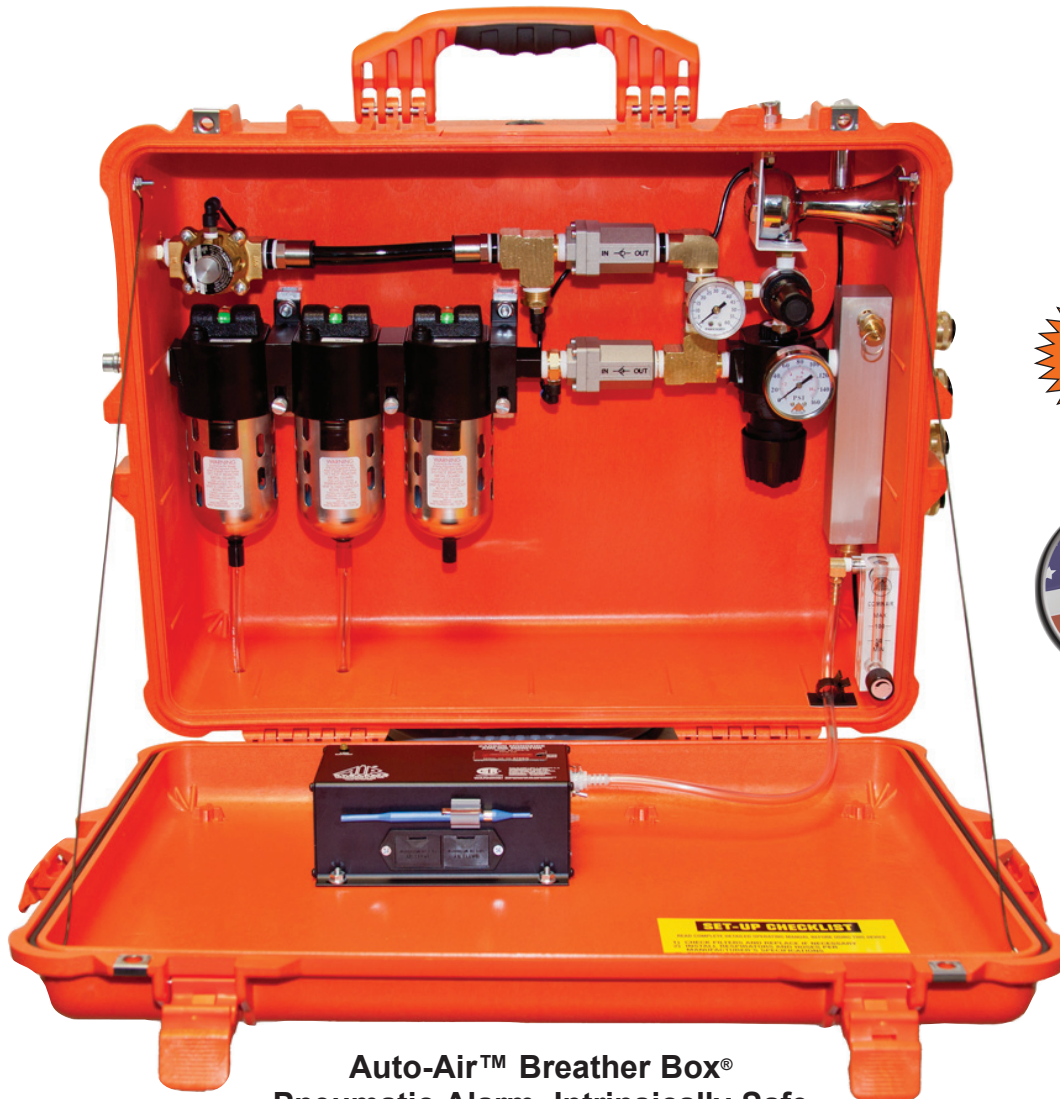

**Auto-Air™ Breather Box®**  
**Pneumatic Alarm, Intrinsically Safe**  
**BB50-COAP**

### Key Details:

- Primary Air Line, ½" Inlet Fitting
- Reserve Air Line, ¼" Inlet Fitting
- Filter Change Indicators on All Filters
- 2 Automatic Drains with Discharge Tubes
- Carbon Monoxide (CO) Monitor
- Remote Alarm Jack Receptacle
- External Warning Lights and Alarm
- Reserve Cylinders Sold Separately

**Always size the reserve air system to allow an adequate safety factor for all workers to egress the environment.**