



Respiratory Safety

MULTI-PAK™ Small Cylinder Air Carts

Issue: Pressure demand airline respirators require Grade-D or Grade-E air and require 70 - 110 psi to operate properly. Some work applications require highly portable, Type-C breathing air source for use in emergencies and remote locations.

Application: Small light weight bottled air carts can be used as a breathing air supply source for short duration routine maintenance operations, confined space entry, emergency response, and stand-by air supply. The MULTI-PAK™ carts are ideal for working in remote and hazardous locations. Air carts are ideal for fire and rescue departments with airline respirators.

Recommendation: The MULTI-PAK™ series of small cylinder carts come in a variety of configurations, accepting 2216 psi or 4500 psi cylinders. The carts are compact, light weight, have a collapsible lifting handle, solid axle with semi pneumatic tires and recessed plumbing. MULTI-PAK™ carts accept all manufacturer's pressure demand respirators and are considered NIOSH point of attachment compliant. Two and four worker versions are available.

MP-2L
MULTI-PAK™ Cart
(Cylinders sold
separately)



MULTI-PAK™ Portable Air Cart
used with a confined space ventilation kit.



For Use In
Hazardous
Locations



www.airsystems.com



Respiratory Safety


MULTI-PAK™ Small Cylinder Air Carts



For Use In
Hazardous
Locations



MP-4H
MULTI-PAK™ Cart
with 4EDZ6 Cylinders
(cylinders sold separately)

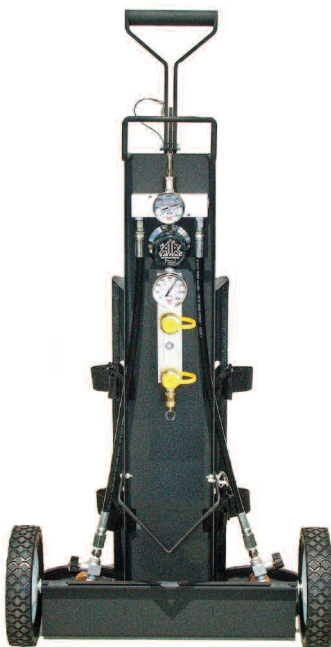

MP-2L
MULTI-PAK™ Cart

Product Features:

- Steel frame with black powder coat paint
- Intrinsically safe low pressure alarm whistle
- Bell alarm version available
- High flow adjustable regulator
- Input and output pressure gauges
- Solid aluminum block manifold
- Nylon cylinder straps with Velcro®
- Quick release hose rack
- Fold down handle
- In-line check valves
- 8" Semi-pneumatic tires
- 21"L x 16"W x 41"H (Handle up), 34.5" (Handle down)
- Weight: 49 lbs. with no cylinders



**Ideal for hazardous locations
and emergency response.**

MULTI-PAK™ Small Cylinder Air Cart

Description	ASI Part #
2 Cylinder MULTI-PAK™ Cart, 2400 psi with 2 outlet manifold, CGA-346 wrench tight nuts . Cylinders not included.	MP-2L
2 Cylinder MULTI-PAK™ Cart, 4500 psi with 4 outlet manifold, CGA-347 hand tight nuts . Cylinders not included.	MP-4H
60 cf Aluminum Air Cylinder with CGA-346 Valve, 2400 psi max	AC-60
87 cf Carbon Fiber Air Cylinder with CGA-347 Valve, 4500 psi max	AC-87



www.airsystems.com