

Air-Light® Tower SLT-400K

The Ultimate Area Light!

Light Head Specifications:

- Dual LED Lights – output total 403,200 lumen
- 201,600 lumens (1500 watt) per lamp head
- **Voltage options:** 208, 240, 480 VAC 3-phase
120 & 230 VAC 1-phase options available
- IP 66 rating
- 50,000 working hour rating
- 120 degree beam angle per head
- Independent lamp heads with full 360° range of motion
- Photocell sensor to auto-shutoff unit during daytime
- Each light panel 24" H X 36" W X 3" D

Other Specifications:

- Powder coated frame available in several colors
- Forklift guides on all 4 sides
- Designed to operate in up to 45 MPH wind
- Four welded D-rings for hoisting or tying down
- Four collapsible 5 foot steel stabilizer legs with leveling jacks
- Base dimension with legs extended 10'6" square
- Telescoping steel mast – 9' 4" retracted. 30' extended height
- Steel cable winch with electric motor; hand crank or pneumatic winch optional
- NEMA 3R rated electrical control box

Dimensions: Base Frame – 4' X 4', 3/8" Steel Frame

Total weight: 2,700 lbs.



Raised
Position
30 Foot
Height



Custom Options Available!
Call Customer Service to discuss
the perfect light for your application.

Front Facing Lights



Light Up the Workspace with 400,000+ Lumens!




360 Degree Coverage
Legs Deployed with Cordon Poles



Light Tower Extended

Specify Voltage When Ordering
Custom Colors Available
Contact Customer Service For Details

Air-Light® Patent
Information:
www.airsystems.com

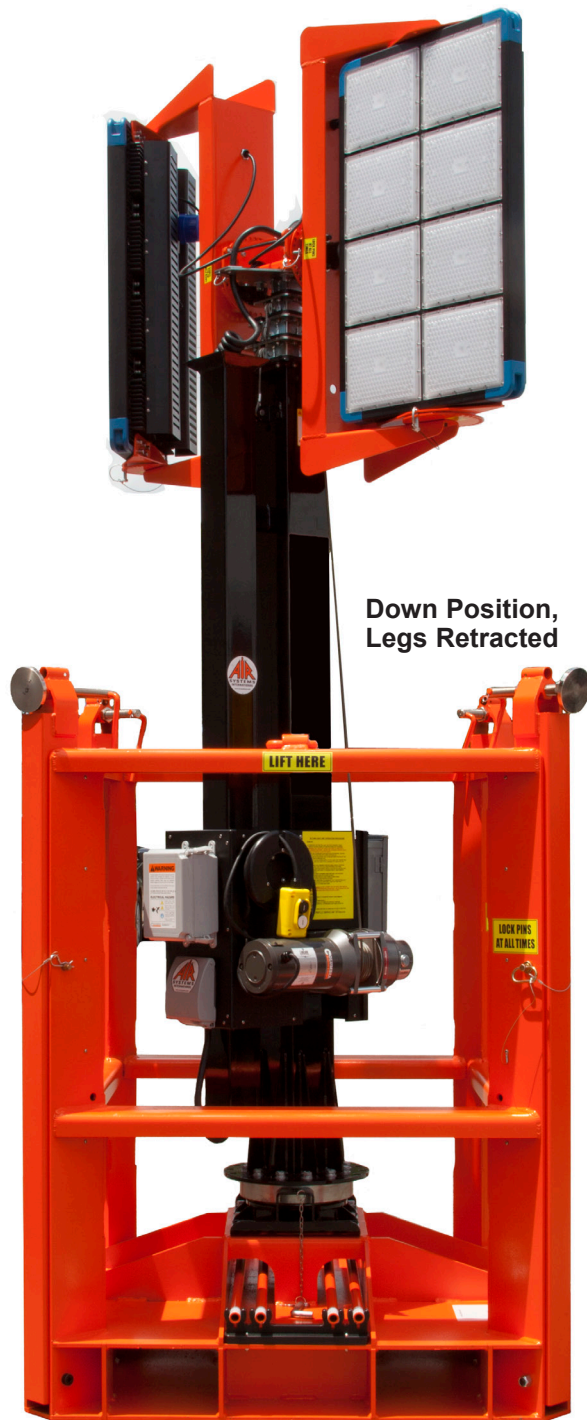

**Down Position,
Legs Retracted**



Air Systems International, Inc.

Sales@airsystems.com

Toll Free: 1 (800) 866-8100

Phone: 1 (757) 424-3967

www.AirSystems.com