



MACK-5500™

Multi-Air Command Kit




***Designed For 5500 psi
High Pressure Cylinders***

www.AirSystems.com


The MACK-5500™ Series

The **MACK-5500™** (Multi-Air Command Kit) Series retains all the features and functionality of a standard MACK-3™ unit, with the added benefit of higher incoming pressures for today's SCBA's and mobile cascade systems. Newly developed breathing air regulators now handle the rigors of cycling inlet pressures ranging from 500 psi to 5,500 psi while precisely maintaining outlet pressures and flow to the connected respirators.

With a “set and forget” outlet control and easily identifiable and manageable air circuits, the operating attendant is now free to manage and cycle the various input sources as needed.

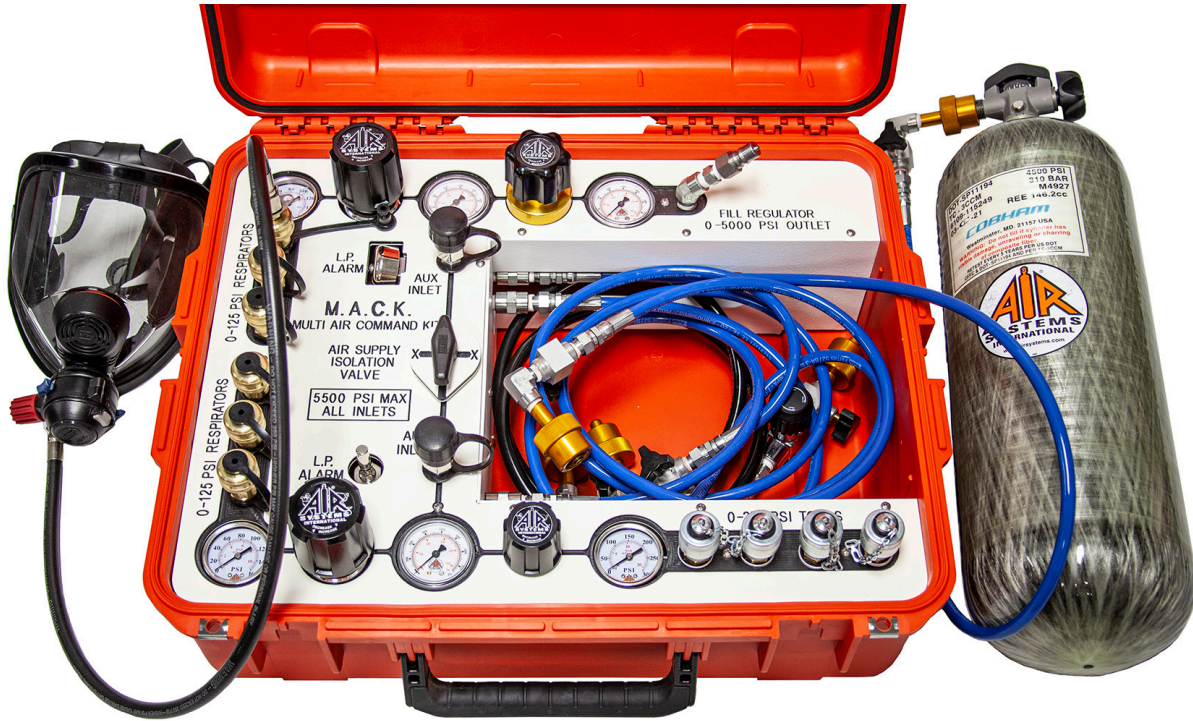

Inside the MACK-5500™

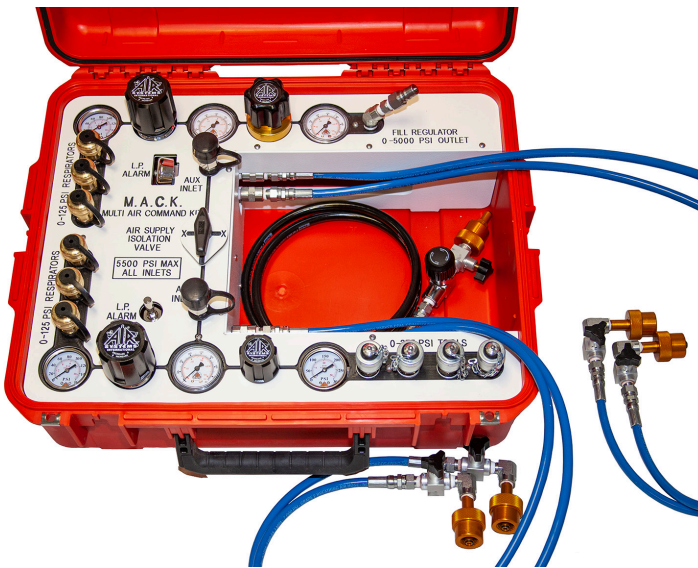

Key Details:

- Four (4) Flexible incoming SCBA connect whips
- Two (2) Incoming CGA-347 Male Adapters
- One (1) air source isolation valve
- One (1) low pressure warning bell, 500 psi alarm set point
- One (1) low pressure warning whistle, 500 psi alarm set point
- Two (2) incoming pressure gauges 0- 7,500 psi
- Two (2) 0-5,500 psi input, 0-125 psi adjustable breathing air regulators
- One (1) 0-5,500 psi input, 0-275 psi adjustable tool air regulator
- One (1) 0-5,500 psi input, 0-5,000 psi adjustable SCBA fill regulator
- One (1) 5,000 psi rated SCBA fill whip with on/off valve, bleeder valve, and CGA-346/347 hand tight cylinder valve connection

MACK-5500™

| Item No. | Description |
|-----------|--|
| MACK-5500 | 6 low pressure respirator/tool couplings (0-125 psi), 4 medium pressure couplings (0-250 psi), 4 high pressure inlet whips (5500 psi), 2 high pressure CGA-347 inlets and pressure caps, low pressure alarm whistle & bell |

Cylinders sold separately



For Use In
Hazardous
Locations

www.AirSystems.com