

8" Centrifugal Blowers for Non-Hazardous Locations

Heavy Duty, Industrial Grade, Ergonomically Designed




SVB-E8EC



SVB-E8EC - Economy Electric Blower

- 8" intake and exhaust
- Steel blower wheel
- Steel handle & frame
- Polyethylene fan housing
- Molded polyethylene safety guards

Model No.	Free Air	25' 1-90° Bend	25' 2-90° Bends
SVB-E8EC	1390 CFM	1075 CFM	890 CFM

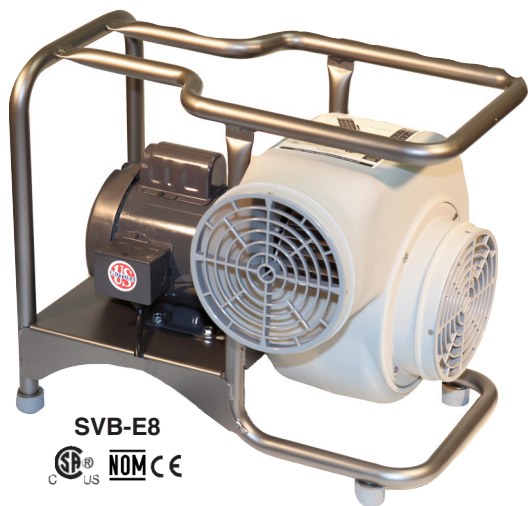

SVB-E8



SVB-E8 Standard Electric Blower

- 8" intake and exhaust
- Aluminum non-sparking blower wheel
- Polyethylene fan housing & safety guards
- Powder coated tubular steel frame
- Dual handles



Model No.	Free Air	25' 1-90° Bend	25' 2-90° Bends
SVB-E8	1570 CFM	1047 CFM	873 CFM
SVB-E850	1308 CFM	872 CFM	729 CFM



SVB-E8-2



SVB-E8-2 2-Speed Electric Blower

- 8" intake and exhaust
- Aluminum non-sparking blower wheel
- Polyethylene fan housing & safety guards
- Powder coated tubular steel frame
- Dual handles

Model No.	Free Air	25' 1-90° Bend	25' 2-90° Bends
SVB-E8-2 High	1570 CFM	1047 CFM	873 CFM
SVB-E8-2 Low	750 CFM	490 CFM	425 CFM



8" Centrifugal Blowers - Electric

Model No.	Description
SVB-E8EC	1/2 HP electric motor, TEFC, 115 VAC, 8 amps, 60 Hz, GFI power cord, 33 lbs.
SVB-E8	3/4 HP electric motor, TEFC, 115 VAC, 10.8 amp, 60 Hz, GFI power cord, 52 lbs.
SVB-E850	3/4 HP, 110/220 VAC, 50/60Hz, TEFC, no plug, 53 Lbs.
SVB-E8-2	3/4 HP, 2-speed electric motor, TEFC, 115 VAC, 11.5 amp, 60 Hz, GFI power cord, 53 lbs.